

Owner's Manual

1-Port USB 2.0 over Cat5 Plug-and-Play Extender Kit with Power over Cable

Model: B203-101-POC

4-Port USB 2.0 over Cat5 Plug-and-Play Extender Kit with Power over Cable

Model: B203-104-POC

Este manual esta disponible en español en la página de
Tripp Lite : triplite.com/support

Ce manuel est disponible en français sur le site Web de
Tripp Lite : triplite.com/support

Русскоязычная версия настоящего руководства представлена на
веб-сайте компании Tripp Lite по адресу: triplite.com/support

WARRANTY REGISTRATION

Register your product today and be automatically entered to
win an ISOBAR surge protector in our monthly drawing!

triplite.com/warranty



1111 W. 35th Street, Chicago, IL 60609 USA • triplite.com/support

Copyright © 2020 Tripp Lite. All rights reserved.

Product Features

- B203-101-POC extends a USB 2.0 signal up to 164 ft. (50 m) from the source
- The B203-104-POC allows you to connect four USB 2.0 devices up to 164 ft. (50 m) from the source
- Supports USB 2.0 data transfer rates up to 480 Mbps
- Power over Cable (PoC) technology provides power to the receivers via Cat5 cable
- Backward compatible with USB 1.1
- Plug-and-Play; no software or drivers required
- Compatible with all major operating systems

Package Includes

- B203-101-POC or B203-104-POC Transmitter
- B203-101-POC or B203-104-POC Receiver
- Owner's Manual

Optional Accessories

- N202-Series Cat6 Snagless Patch Cables
- U022-Series USB 2.0 Cables
- UR022-Series Reversible USB 2.0 Cables
- U030-Series USB 2.0 5-Pin Mini-B Cables
- UR030-Series Reversible USB 2.0 5-Pin Mini-B Cables
- U050-Series USB 2.0 Micro-B Cables
- UR050-Series Reversible USB 2.0 Micro-B Cables

Installation

Note: Test to make sure that the entire installation works properly before pulling cables through ceilings or walls.


- 1.** Connect the built-in USB cable on the transmitter unit to an available USB port on your computer.
- 2.** Connect the RJ45 ports on the transmitter and receiver units with Cat5e/6 cable.

Note: The distance between the transmitter and receiver units must be no longer than 164 ft. (50 m).


- 3.** Connect a USB 2.0 device to each available port on the receiver unit.
- 4. (Optional)** If connecting power-hungry device(s), use the USB Micro-B port on the receiver to add external power.

Installation Diagrams

B203-101-POC

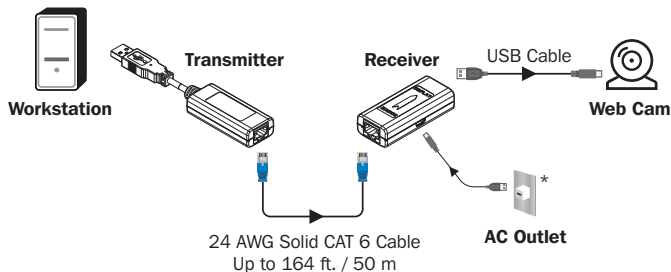

B203-104-POC

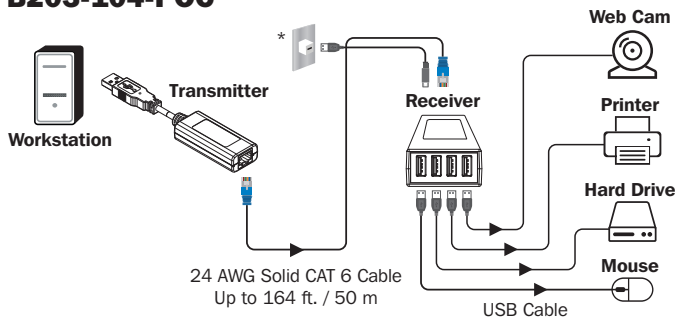

* When connecting the receiver to high-power device(s), add external power via its USB Micro-B port.

Specifications

Specification	B203-101-POC	B203-104-POC
Supported USB Versions	USB 2.0 (480 Mbps), USB 1.1 (12 Mbps)	
Transmitter Ports	(x1) RJ45	
Receiver Ports	(x1) RJ45 ; (x1) USB-A ; (x1) USB Micro-B	(x1) RJ45 ; (x4) USB-A ; (x1) USB Micro-B
Transmitter Plug	USB-A	
Maximum Extension Distance	164 ft. (50 m)	
Operating Temperature	32°F to 122°F (0° to 50°C)	
Storage Temperature	-4°F to 158°F (-20° to 70°C)	
Transmitter Dimensions [H x W x D]	0.59 x 14.36 x 1.02 in. (15 x 365 x 26 mm)	
Receiver Dimensions [H x W x D]	0.59 x 2.36 x 1.02 in. (15 x 60 x 26 mm)	1.95 x 1.00 x 2.42 in. (50 x 26 x 62 mm)

Warranty and Product Registration

1-Year Limited Warranty

TRIPP LITE warrants its products to be free from defects in materials and workmanship for a period of one (1) year from the date of initial purchase. TRIPP LITE's obligation under this warranty is limited to repairing or replacing (at its sole option) any such defective products. To obtain service under this warranty, you must obtain a Returned Material Authorization (RMA) number from TRIPP LITE or an authorized TRIPP LITE service center. Products must be returned to TRIPP LITE or an authorized TRIPP LITE service center with transportation charges prepaid and must be accompanied by a brief description of the problem encountered and proof of date and place of purchase. This warranty does not apply to equipment which has been damaged by accident, negligence or misapplication or has been altered or modified in any way.

EXCEPT AS PROVIDED HEREIN, TRIPP LITE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Some states do not permit limitation or exclusion of implied warranties; therefore, the aforesaid limitation(s) or exclusion(s) may not apply to the purchaser.

EXCEPT AS PROVIDED ABOVE, IN NO EVENT WILL TRIPP LITE BE LIABLE FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OF THIS PRODUCT, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE. Specifically, TRIPP LITE is not liable for any costs, such as lost profits or revenue, loss of equipment, loss of use of equipment, loss of software, loss of data, costs of substitutes, claims by third parties, or otherwise.

Warranty and Product Registration

PRODUCT REGISTRATION

Visit triplite.com/warranty today to register your new Tripp Lite product. You'll be automatically entered into a drawing for a chance to win a FREE Tripp Lite product!*

* No purchase necessary. Void where prohibited. Some restrictions apply. Open to U.S. residents only. See triplite.com for details.

FCC Notice, Class B

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warranty and Product Registration

Any changes or modifications to this equipment not expressly approved by Tripp Lite could void the user's authority to operate this equipment.

WEEE Compliance Information for Tripp Lite Customers and Recyclers (European Union)



Under the Waste Electrical and Electronic Equipment (WEEE) Directive and implementing regulations, when customers buy new electrical and electronic equipment from Tripp Lite they are entitled to:

- Send old equipment for recycling on a one-for-one, like-for-like basis (this varies depending on the country)
- Send the new equipment back for recycling when this ultimately becomes waste

Tripp Lite has a policy of continuous improvement. Product specifications are subject to change without notice. Photos and illustrations may differ slightly from actual products.



1111 W. 35th Street, Chicago, IL 60609 USA • tripplite.com/support